





CHANNELS


VIP 100



VIEW FROM BELOW

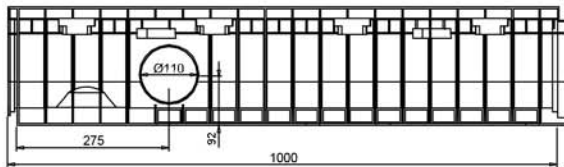

SIDE VIEW




SECTION




VIP 100/160


CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h mm	INTERNAL DIMENSIONS L x l x h mm	WEIGHT Kg	DRAINAGE SURFACE cm ²	CAPACITY	PREINSTALLED DRAIN mm
702000		PE-HD	1000 x 158 x 214	1000 x 100 x 160	2,55	145,28	14,52	side 2 x Ø 110 bottom 1 x Ø 110



VIEW FROM BELOW

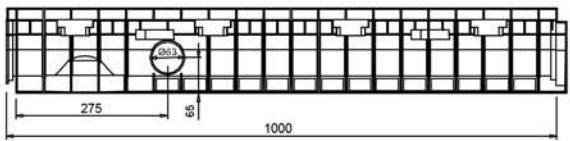

SIDE VIEW



SECTION



VIP 100/100

CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h mm	INTERNAL DIMENSIONS L x l x h mm	WEIGHT Kg	DRAINAGE SURFACE cm ²	CAPACITY	PREINSTALLED DRAIN mm
702001		PE-HD	1000 x 158 x 154	1000 x 100 x 100	2,05	89,56	8,95	side 2 x Ø 63 bottom 1 x Ø 110

N.B. Waterproofing: in order to ensure the channels are waterproof, a bituminous adhesive sealant should be used. Heat-sealing the channel joints makes sure there will be no leakages through said joints for a very long time. For further information please contact MufleSystem's Technical Department.
N.B. Sizes and weights are subject to usual manufacturing tolerance values.