





CHANNELS


VIP
150

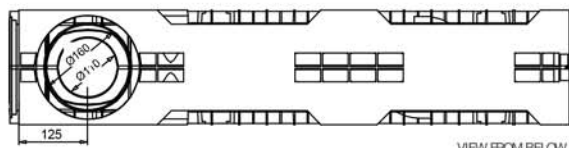

VIEW FROM BELOW

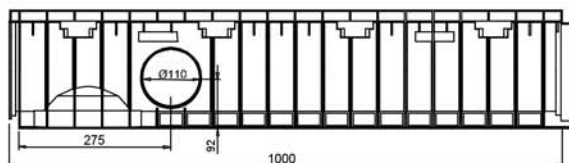

SIDE VIEW




SECTION




VIP 150/160


CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h mm	INTERNAL DIMENSIONS L x l x h mm	WEIGHT kg	DRAINAGE SECTION cm ²	CAPACITY dm ³	PREINSTALLED DRAIN OUTLETS mm
702002		PE-HD	1000 x 208 x 214	1000 x 150 x 160	3,00	213,04	21,30	side 2 x Ø 110 bottom 1 x Ø 110; 1 x Ø 160

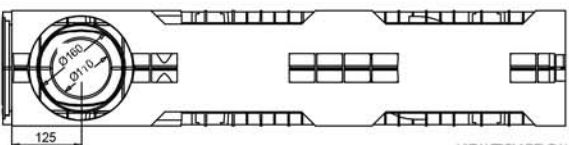

VIEW FROM BELOW

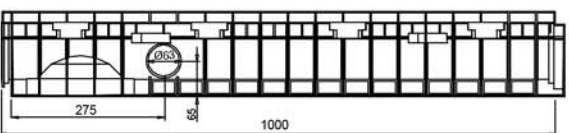

SIDE VIEW




SECTION




VIP 150/100


CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h mm	INTERNAL DIMENSIONS L x l x h mm	WEIGHT kg	DRAINAGE SECTION cm ²	CAPACITY dm ³	PREINSTALLED DRAIN OUTLETS mm
702003		PE-HD	1000 x 208 x 154	1000 x 150 x 100	2,45	127,32	12,73	side 2 x Ø 63 bottom 1 x Ø 110; 1 x Ø 160

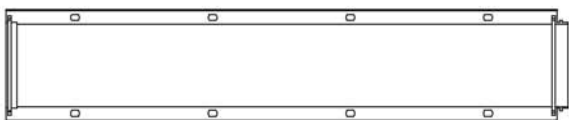

VIEW FROM BELOW



SIDE VIEW



SECTION



VIP 150/40

CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h mm	INTERNAL DIMENSIONS L x l x h mm	WEIGHT kg	DRAINAGE SECTION cm ²	CAPACITY dm ³	PREINSTALLED DRAIN OUTLETS mm
502004		PE-HD	1000 x 204 x 94	1000 x 150 x 40	2,00	56,50	5,65	side 2 x Ø 50 bottom 1 x Ø 100

N.B. Waterproofing: in order to ensure the channels are waterproof, a bituminous adhesive sealant should be used. Heat-sealing the channel joints makes sure there will be no leakages through said joints for a very long time. For further information please contact MufleSystem's Technical Department.

N.B. Sizes and weights are subject to usual manufacturing tolerance values.