







# CHANNELS

VIP  
200

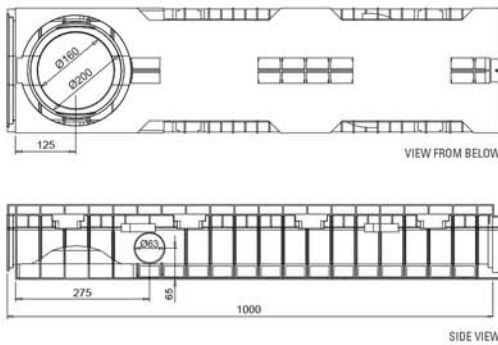

VIP 200/100								
CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h	INTERNAL DIMENSIONS L x l x h	WEIGHT	DRAINAGE SECTION	CAPACITY	PREINSTALLED DRAIN OUTLETS
	€		mm	mm	kg	cm <sup>2</sup>	dm <sup>3</sup>	mm
702005		PE-HD	1000 x 258 x 154	1000 x 200 x 100	2,80	178,63	17,86	side 2 x Ø 63 bottom 1 x Ø 160; 1 x Ø 200

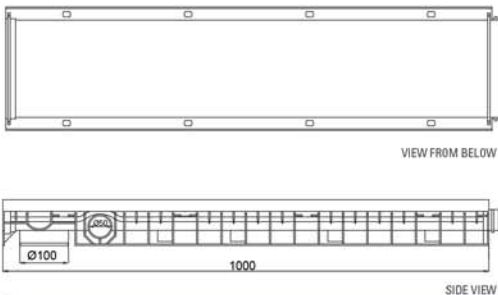

VIP 200/40								
CODE	PRICE	MATERIAL	EXTERNAL DIMENSIONS L x l x h	INTERNAL DIMENSIONS L x l x h	WEIGHT	DRAINAGE SURFACE	CAPACITY	PREINSTALLED DRAIN
	€		mm	mm	kg	cm <sup>2</sup>	dm <sup>3</sup>	mm
502007		PE-HD	1000 x 254 x 94	1000 x 200 x 40	2,20	76,50	7,65	side 2 x Ø 50 bottom 1 x Ø 100


N.B. Waterproofing: in order to ensure the channels are waterproof, a bituminous adhesive sealant should be used. Heat-sealing the channel joints makes sure there will be no leakages through said joints for a very long time. For further information please contact MufleSystem's Technical Department.

N.B. Sizes and weights are subject to usual manufacturing tolerance values.




# CANALI


VIP  
200

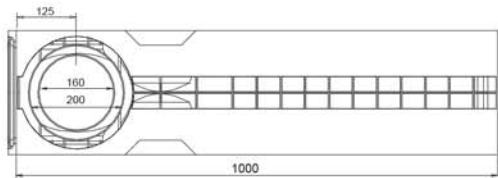

VISTA DAL BASSO

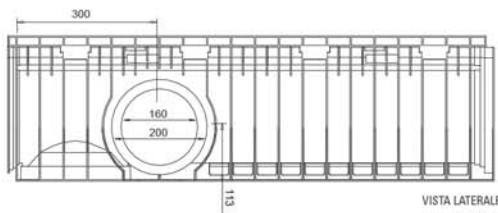

VISTA LATERALE




SEZIONE




## VIP 200/250

CODICE	PREZZO	MATERIALE	MISURE ESTERNE L x l x h	MISURE INTERNE L x l x h	PESO	SEZIONE DRENAGGIO	CAPACITÀ	SCARICHI PREINSTALLATI
	€		mm	mm	kg	cm <sup>2</sup>	dm <sup>3</sup>	mm
502042		PE-HD	1000 x 258 x 304	1000 x 200 x 250	4,50	430,00	43,00	lateralì 2 x Ø 200; 2 x Ø 160 inferiori 1 x Ø 200; 1 x Ø 160

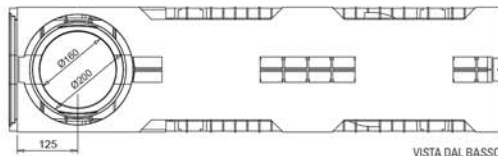

VISTA DAL BASSO

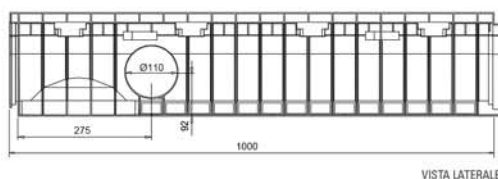

VISTA LATERALE



SEZIONE



## VIP 200/160

CODICE	PREZZO	MATERIALE	MISURE ESTERNE L x l x h	MISURE INTERNE L x l x h	PESO	SEZIONE DRENAGGIO	CAPACITÀ	SCARICHI PREINSTALLATI
	€		mm	mm	kg	cm <sup>2</sup>	dm <sup>3</sup>	mm
702004		PE-HD	1000 x 258 x 214	1000 x 200 x 160	3,40	275,87	27,58	lateralì 2 x Ø 110 inferiori 1 x Ø 160; 1 x Ø 200

N.B. Tenuta all'acqua: per assicurare la tenuta stagna delle canalette, si consiglia l'utilizzo di un adesivo sigillante bituminoso. A garanzia completa e duratura dell'assenza di perdite attraverso i giunti delle canalette si può provvedere alla saldatura a caldo dei giunti stessi. Per maggiori informazioni contattare l'Ufficio Tecnico MuffeSystem.

N.B. Le dimensioni ed i pesi sono soggetti alle normali tolleranze di fabbricazione.